



X-Series Intrinsically Safe Flashlight with Multi-Angle Mount

200
Lumens

- cETLus, ATEX, and IECEx listed Intrinsically Safe
- Beam distance rated at 143 meters
- Polymer housing
- Mount attaches to either side of the helmet



This Flashlight is cETLus, ATEX, and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. Uses a CREE® LED rated at 200 lumens that works with a deep parabolic reflector to create a 143 meter flashlight beam. The tail switch provides momentary or constant-on functionality. Meets the requirements of NFPA-1971-8.6. Power comes from 3 AA premium batteries. The mount can be attached to either side of the helmet to provide hands-free illumination. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment.

INTRINSICALLY SAFE



EIT-GFL


X-Series Intrinsically Safe Flashlight with Multi-Angle Mount

FEATURES

- cETLus, ATEX, and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Glass filled nylon polymer housing
- Non-slip grip
- Tail switch
- Mount can be attached to either side of helmet
- Mount allows for clearance around face shields, goggles or other helmet-mounted equipment.
- Dustproof / Waterproof
- Impact and chemical resistant
- Meets Requirements of NFPA-1971-8.6 (2013)
- 3 AA batteries (not included)
- Limited Lifetime Warranty

SPECIFICATIONS

- Lumens: 200
- Run-time: 10 hrs
- Beam Distance: 143 meters
- Candela: 5129
- Water / Dust Rating: IP-67
- Drop Rating: 2 meters
- Dimensions: Length 5.6 in., Head Diameter 1.5 in., Handle Diameter .75 x 1.4 in., Weight 5.4 oz.

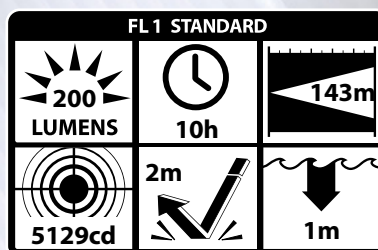

SAFETY RATING

cETLus, ATEX, and IECEx listed Intrinsically Safe



Single tail switch



High-efficiency deep parabolic reflector



Clip Mount
(mounts to either side of helmet)



Slot Mount
(mounts to either side of helmet)

Model	UPC 0 17398
EIT-GFL	80620 6